



FULL BODY

VITRIFIED TILES

600X 1200 mm

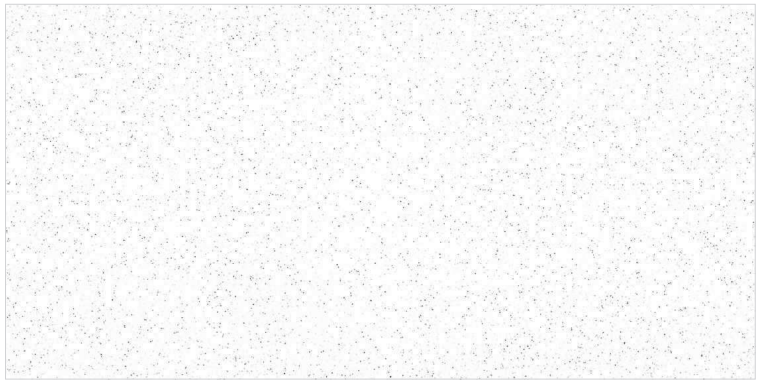

GENESIS BIANCC POLISHED

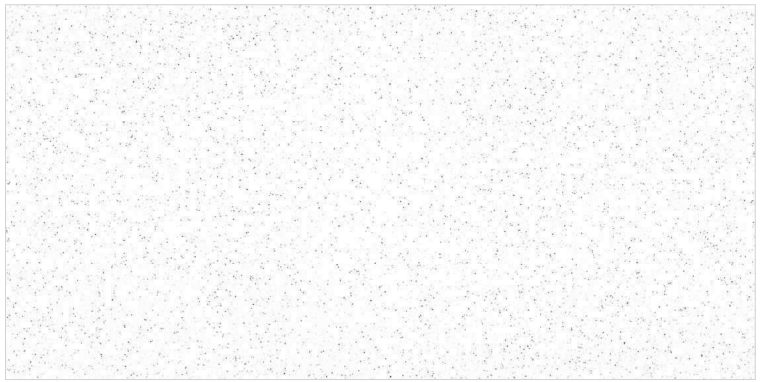

CREST BIANCC SATIN

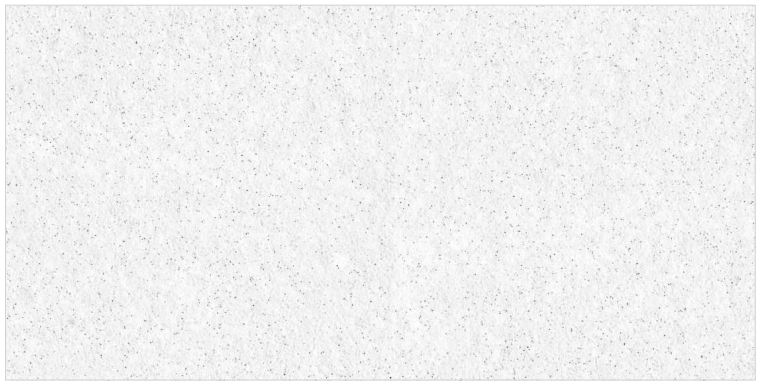

ROCK BIANCC RUSTIC





DUAL BIANCC
LAPPATC



GENESIS NERC POLISHED



CREST NERC SATIN



ROCK NERC RUSTIC



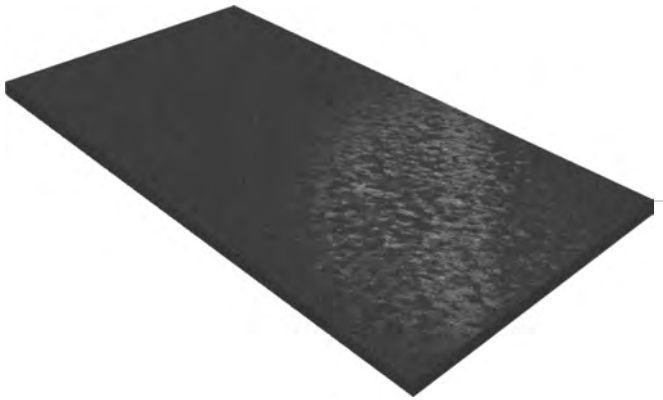

DUAL NERC
LAPPATO

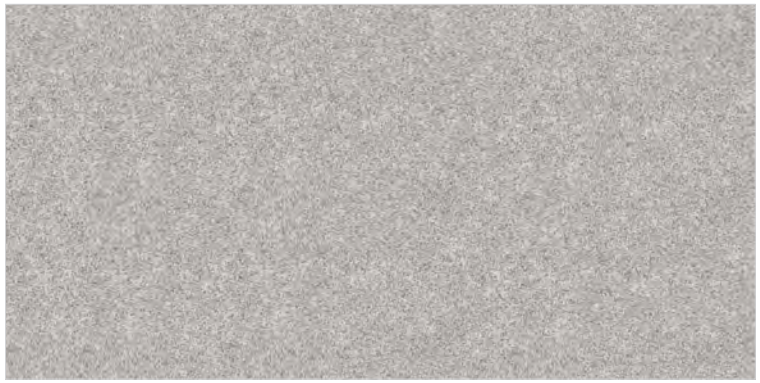

GENESIS PLUTC POLISHED



CREST PLUTC SATIN



ROCK PLUTC RUSTIC





DUAL PLUTC
LAPPATC

600x1200mm
FULLBODY
VITRIFIED TILES

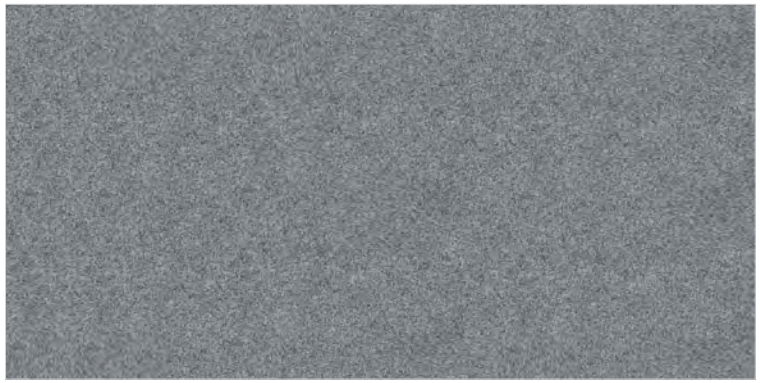

CREST CARLC SATIN

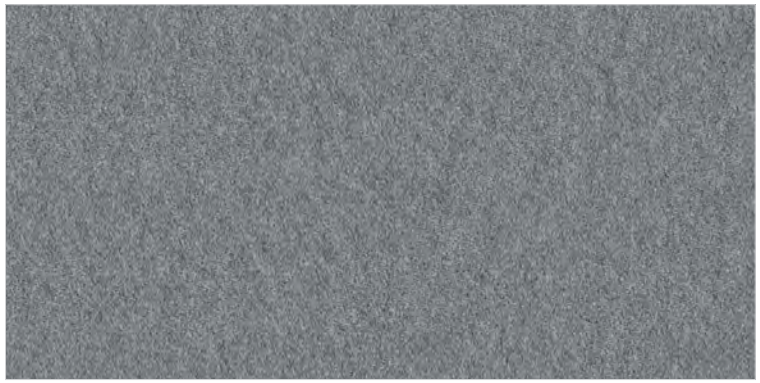

ROCK CARLC RUSTIC

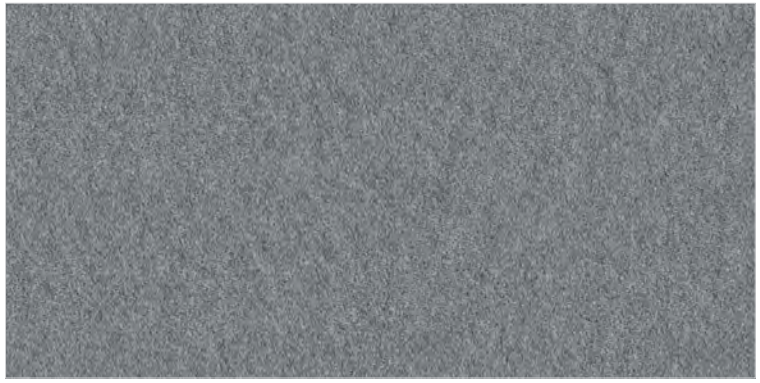

DUAL CARLC LAPPATC





GENESIS GRIS POLISHED



CREST GRIS SATIN

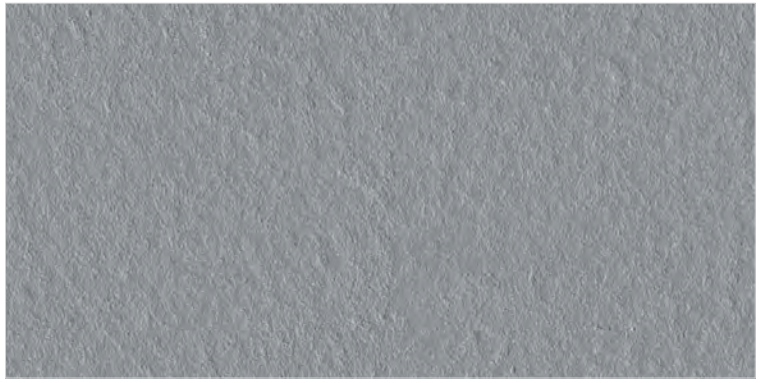

ROCK GRIS RUSTIC



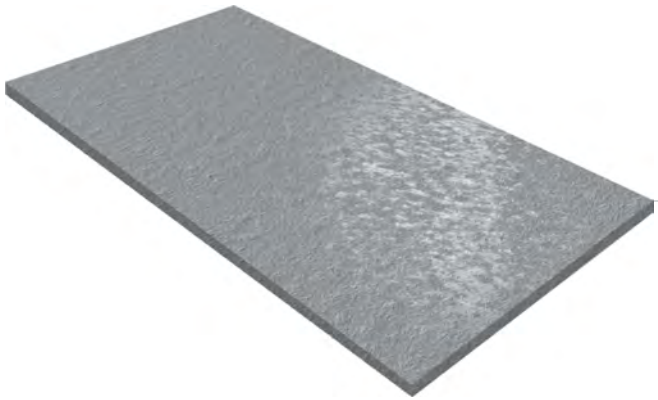

DUAL GRISS
LAPPATO

ROCKSTONE
SERIES

600x1200mm
FULLBODY
VITRIFIED TILES

GENESIS BEIGE — POLISHED

CREST BEIGE — SATIN

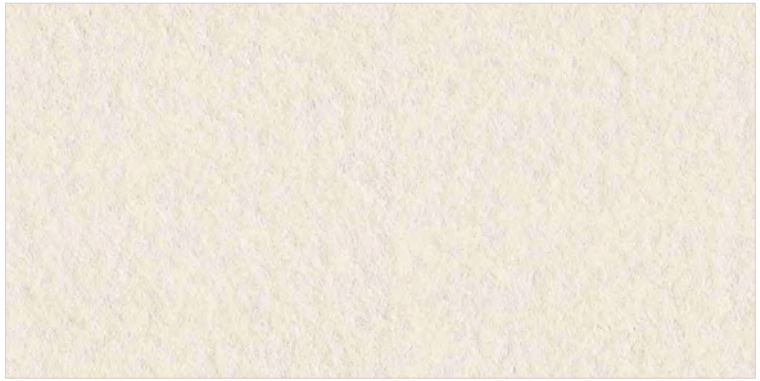

ROCK BEIGE — RUSTIC





DUAL BEIGE
LAPPATO



GENESIS MINK POLISHED



CREST MINK SATIN



ROCK MINK RUSTIC





DUAL MINK
LAPPATO

ROCK STONE
SERIES

600x1200mm
FULLBODY
VITRIFIED TILES

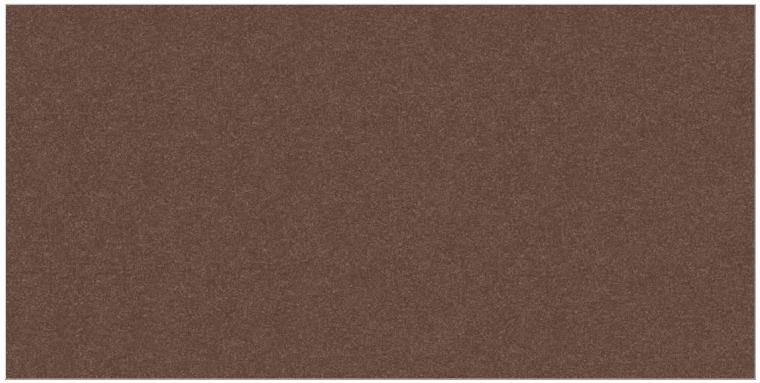

GENESIS BROWN — POLISHED

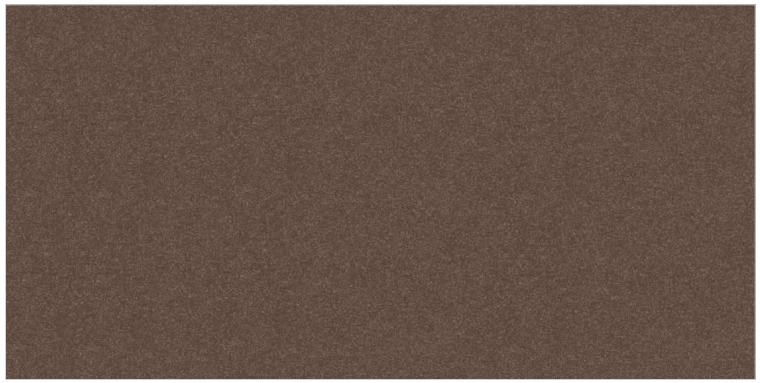

CREST BROWN — SATIN



ROCK BROWN — RUSTIC





DUAL BROWN
LAPPATO

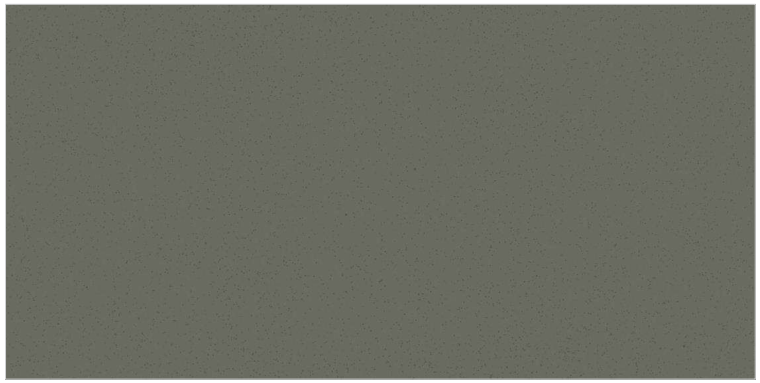

GENESIS COTTA POLISHED

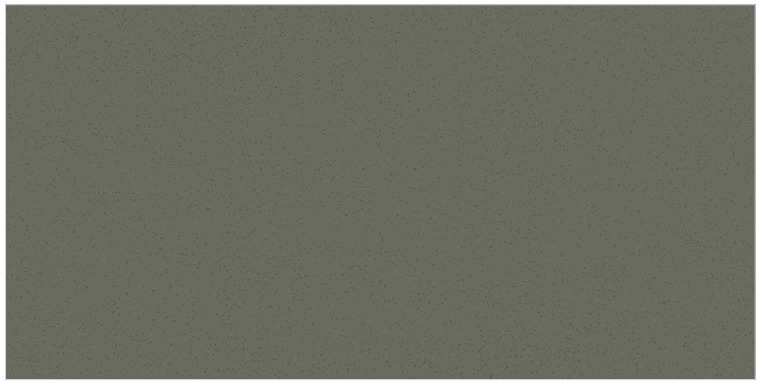

CREST COTTA SATIN



ROCK COTTA RUSTIC



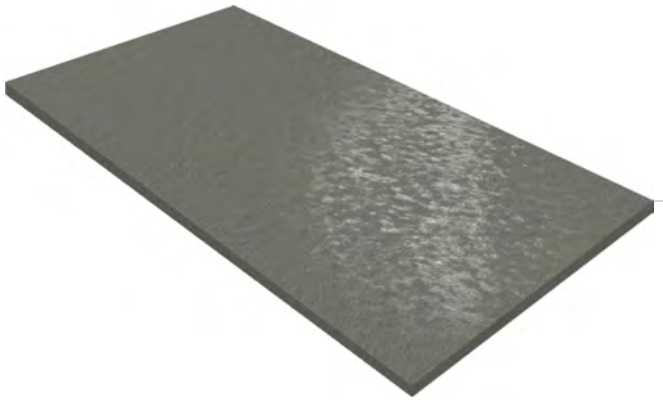

DUAL COTTA
LAPPATO

ROCK STONE
SERIES

600x1200mm
FULLBODY
VITRIFIED TILES

GENESIS ARTICC POLISHED

CREST ARTICC SATIN



ROCK STONE
SERIES

600x1200mm
FULLBODY
VITRIFIED TILES



GENESIS CHOCC POLISHED



CREST CHOCC SATIN

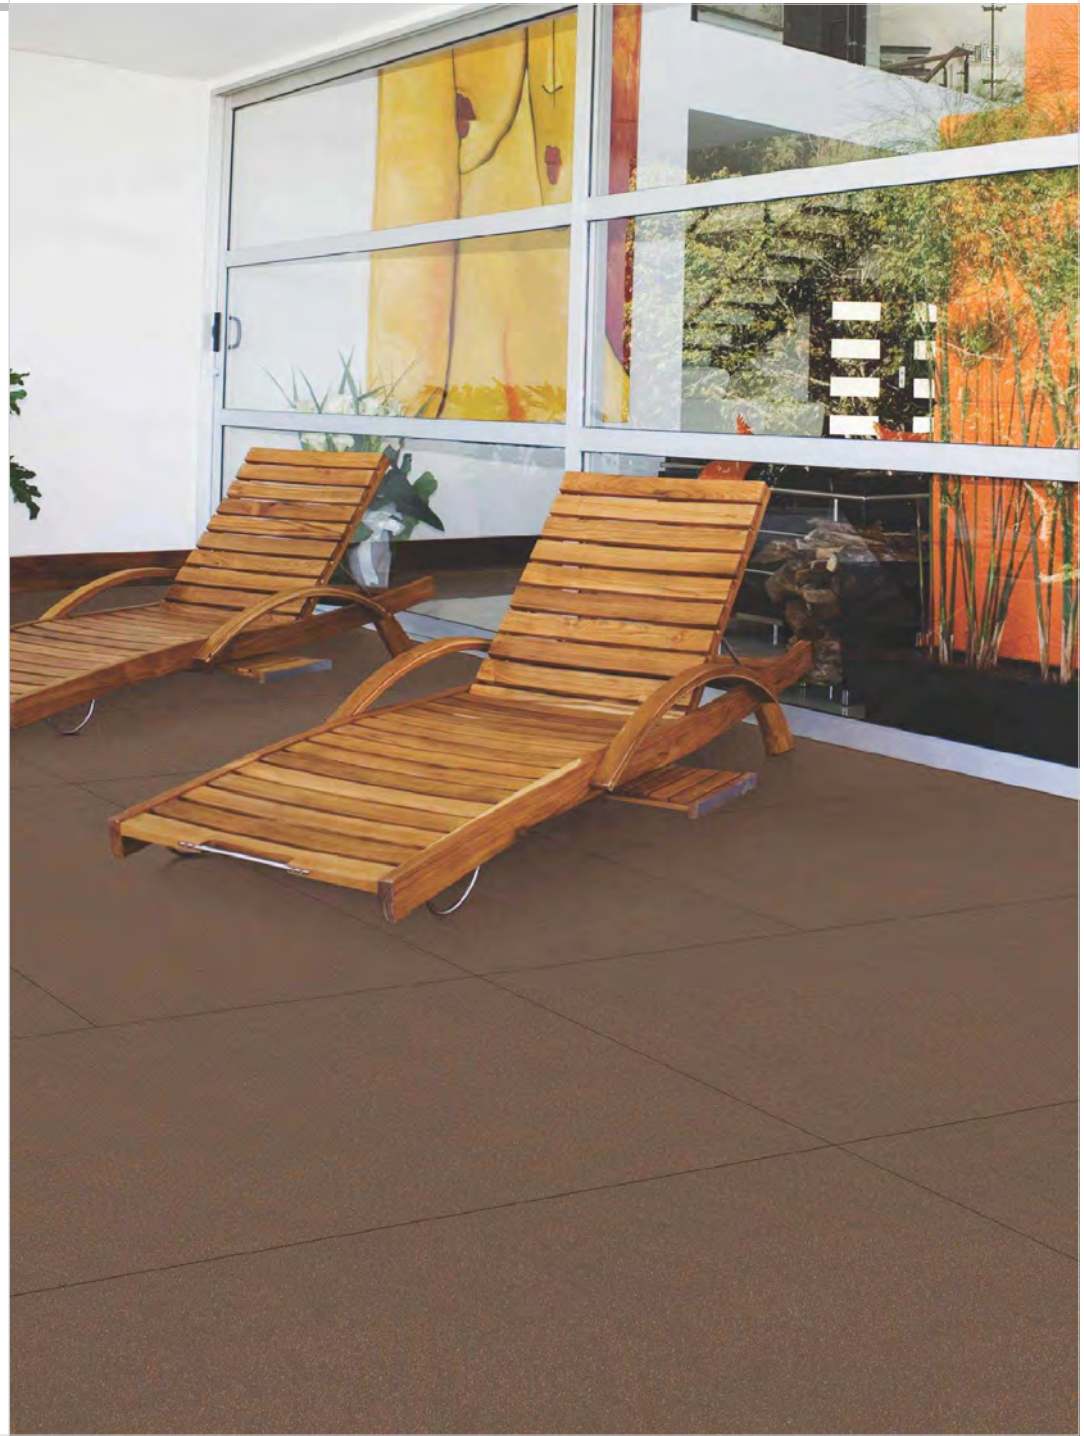



LUX GENESIS AVANC POLISHED



LUX CREST AVANC SATIN





LUX GENESIS JAVANC POLISHED



LUX CREST JAVANC SATIN





LUX GENESIS MILANC POLISHED



LUX CREST MILANC SATIN





LUX GENESIS ROMANC POLISHED



LUX CREST ROMANC SATIN



600x1200mm
FULLBODY
VITRIFIED TILES

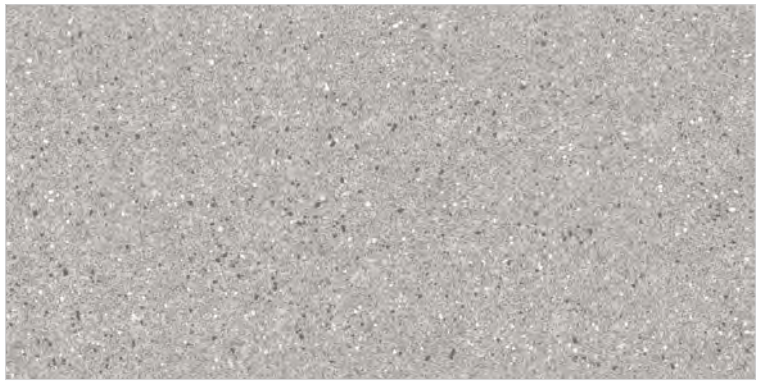

FLAKE GENESIS PLUTC POLISHED

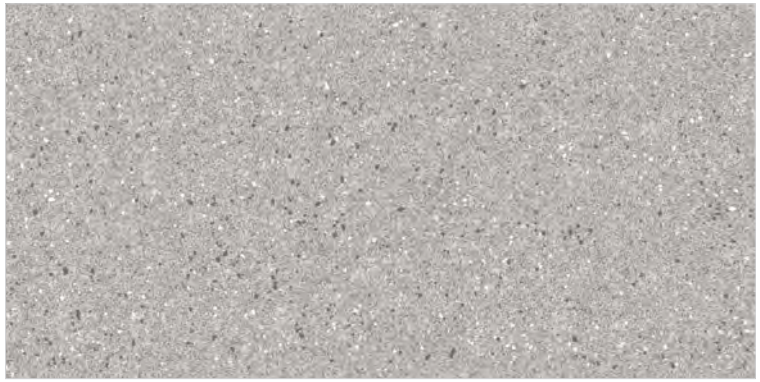

FLAKE CREST PLUTC SATIN



FLAKE
SERIES

600x1200mm
FULLBODY
VITRIFIED TILES

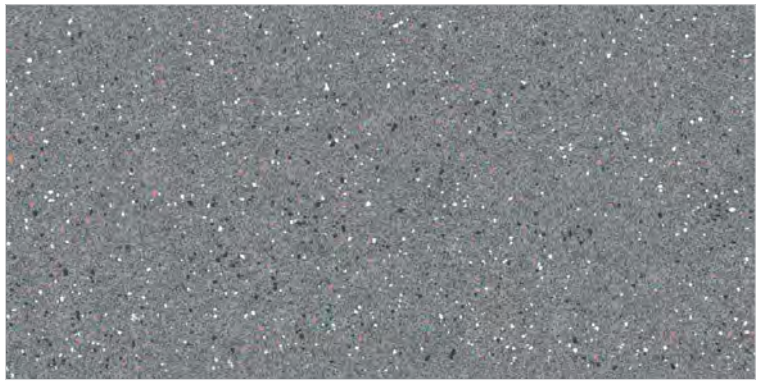

FLAKE GENESIS CARLC POLISHED

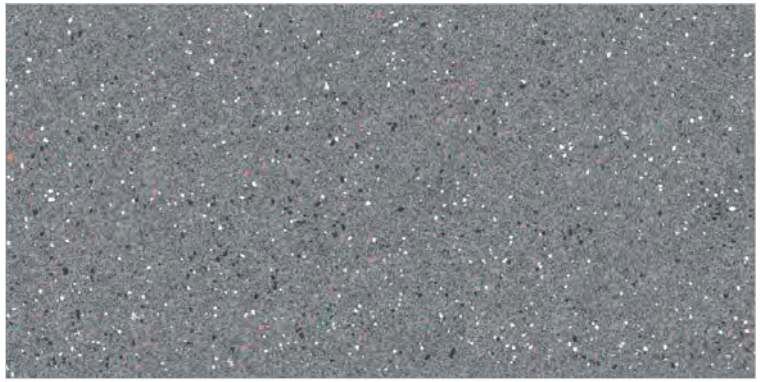

FLAKE CREST CARLC SATIN





FLAKE GENESIS CREMA POLISHED



FLAKE CREST CREMA SATIN



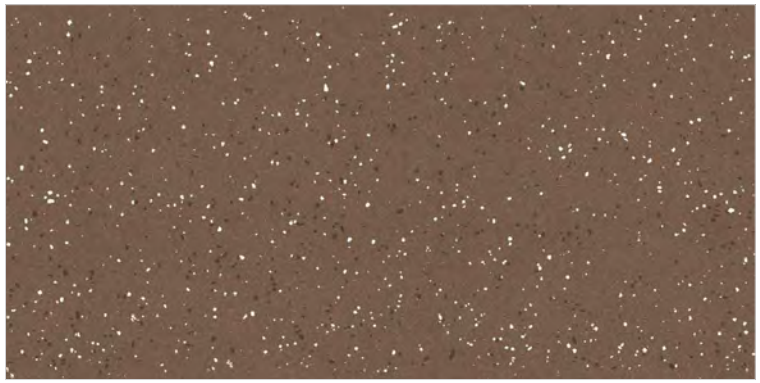

FLAKE GENESIS CHOCC POLISHED

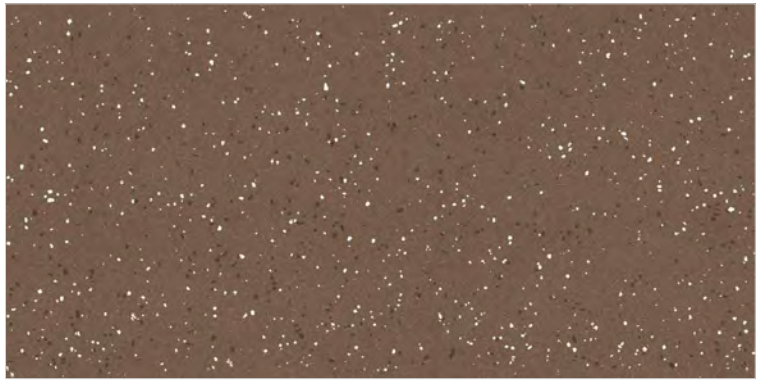

FLAKE CREST CHOCC SATIN



INSTALLATION **SYSTEMS**



INSTALLATION ONTO GRASS

Easy to install and removable. Suitable for residental gardens and public parks.



ADHESIVE INSTALLATION ONTO FOOTING

Corrigible floors continues effect with indoor floors slabs available in standard thickness.



INSTALLATION ON TO GRAVEL & /OR SAND

Easy to install and removable Perfect colors and design to enhance contemporary buildings.



RAISED INSTALLATION ONTO FLAT SURFACES

Easy to inspect. Housing for cables, electrical circuits.

EFFICIENCY PERFORMANCE

- EASY TO CLEAN
- EASY TO INSTALL
- COLOUR REMAINS UNCHANGED OVER TIME
- HIGH BREAKAGE LOAD
- FROST RESISTANT
- RESISTANT TO CORROSION FROM SALT
- OUTDOOR APPLICATION + COORDINATED INDOORS
- ANTI-SLIP
- RESISTANT TO STAINS, ACIDS AND CHEMICALS
- RESISTANT TO THERMAL SHOCK
- REMOVABLE, EASY TO INSPECT AND REUSABLE
- VERSATILE
- RESISTANT TO ATTACK FROM
- IT DOES NOT REQUIRE SPECIAL TREATMENTS
- ENVIRONMENTALLY FRIENDLY

FULLBODY
VITRIFIED TILES

TECHNICAL SPECIFICATION

No.	TECHNICAL DETAIL	INTERNATIONAL STD, ISO 13006/EN 176, B1A	VALUES	METHOD OF TESTING
1	Deviation in Length & Width	±0.6%	±0.1%	ISO 10545-2
2	Deviation in Thickness	±5%	±2%	ISO 10545-2
3	Straightness of Sides	±0.5%	±0.1%	ISO 10545-2
4	Rectangularity	±0.6%	±0.1%	ISO 10545-2
5	Surface Flatness	±0.5%	±0.1%	ISO 10545-2
6	Hardness on Mohs Scale	> 6	> 7	EN 101
7	Water Absorption	< 0.5%	< 0.05%	ISO 10545-3
8	Flexural Strength (Mor)	> 35 N/m²	> 40 N/m²	ISO 10545-4
9	Abrasion Resistance	< 175 mm³	< 145 mm³	ISO 10545-6
10	Skid Resistance	> 0.4	> 0.4	ISO 10545-17
11	Bulk Density	> 2	> 2.4	DIN 51082
12	Frost Resistance	Frost Proof	Frost Proof	ISO 10545-12
13	Chemical Resistance	No Damage	No Damage	ISO 10545-13
14	Thermal Shock	No Damage	No Damage	ISO 10545-9
15	Thermal Expansion	< 9 x 10⁻⁶	< 6 x 10⁻⁶	ISO 10545-8
16	Stain Resistance	Resistant	Resistant	ISO 10545-14
17	Moisture Expansion	Nil	Nil	ISO 10545-10
18	Glossiness	Gloss Meter	Min 90 Reflection	ISO 10545-2
19	Breaking Strength	1300 N	2000 N	ISO 10545-4

PACKING DETAIL

No.	SIZE	PCS / BOX	Sq. Mtr.	Sq. Ft.
01	600mm X 1200mm	2	1.44	15.50

APPLICATIONS

AIRPORT TERMINALS · HOTELS · OFFICES · RESTAURANTS - CAFES · WORKSHOPS · SUPER MARKETS · SHOPPING MALLS · DOMESTIC · HOSPITALS · SCHOOLS